


PATRIOT-AT™ PORTABLE - ASSEMBLY INSTRUCTIONS

1. The **BALLAST TANK** needs to be filled with sand to make the lift stable during usage. This will require twelve (12) 50lb bags of all-purpose sand, or equivalently 600lbs [272kg] of medium-grain sand to fill to the required weight.
2. Remove the caps from each of the two filling holes on the BALLAST TANK.
3. Using a large funnel pour the sand into the tank. Alternate sides to keep the sand even, and shake or tap the tank periodically to level it out. Fill the tank with at least 600lbs of “all-purpose” or medium-grain sand. **DO NOT USE THE LIFT UNTIL THE TANK HAS BEEN FILLED!**
4. Replace the caps to seal the tank.

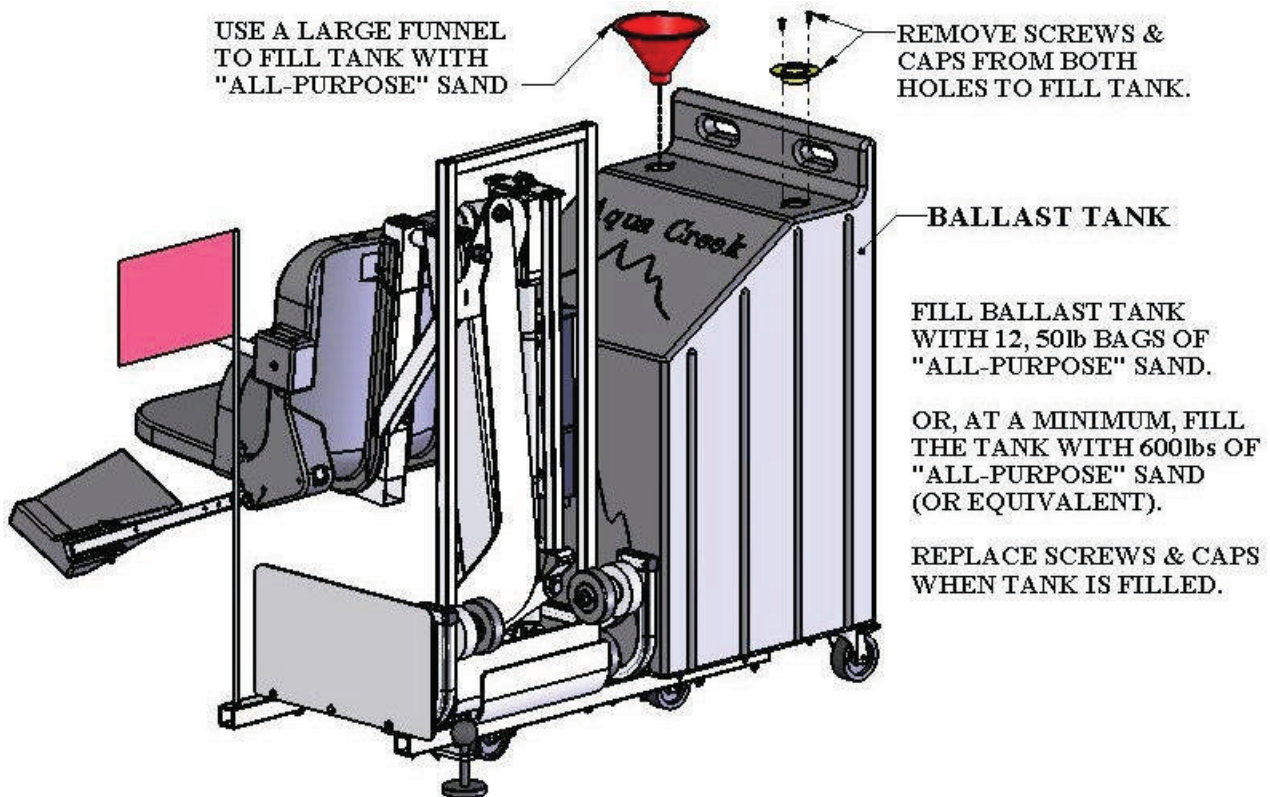

⚠ WARNING! DO NOT OPERATE THE LIFT BEFORE FILLING THE BALLAST TANK